

Simply the best fixation.




**FISO**  
Swiss Made

**Strato Line**  
**3D Articulated Gauging Arm**



## Precisely positioned and fixed in no time.

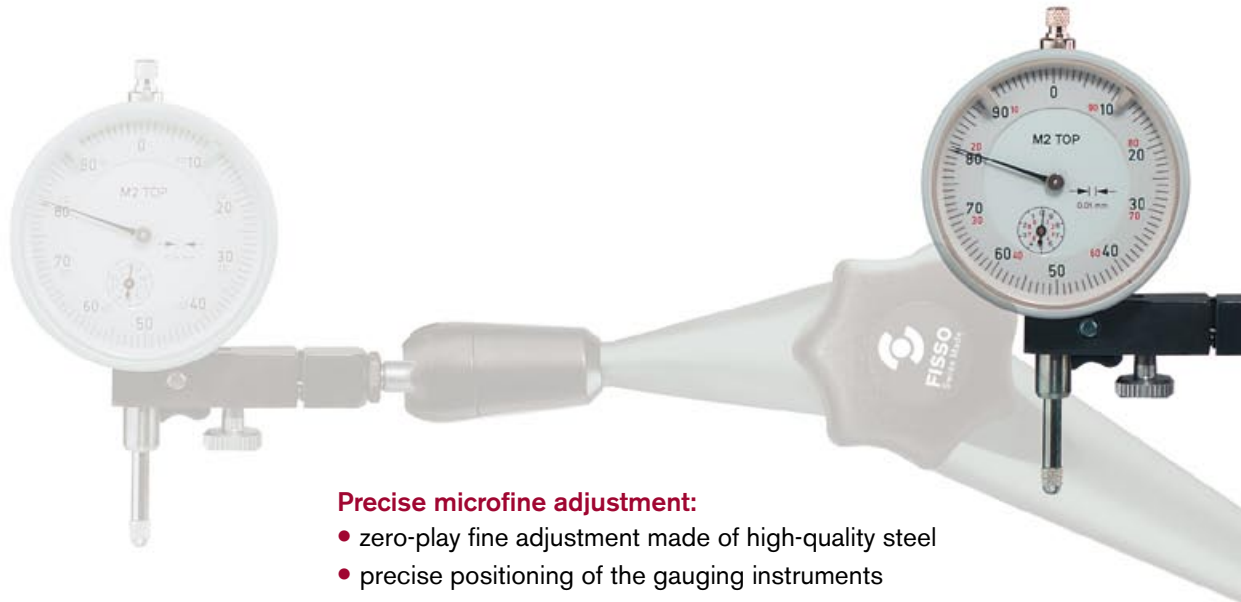


### Precise microfine adjustment:

- zero-play fine adjustment made of high-quality steel
- precise positioning of the gauging instruments
- high accuracy
- combined holder for dial gauges and electronic length probes

The Fisso articulated arms can be positioned easily and precisely in the desired position. All three joints are fixed with the central tightening knob. The quick lock and the stepless tensioning system assure high ease of use and allow efficient working.

### Innovative top-quality products

The Fisso brand stands for user-friendly, individualized holding systems that meet all customer requirements. Fisso, the well-proven original ensures high reliability, functional design, and is Swiss Made.

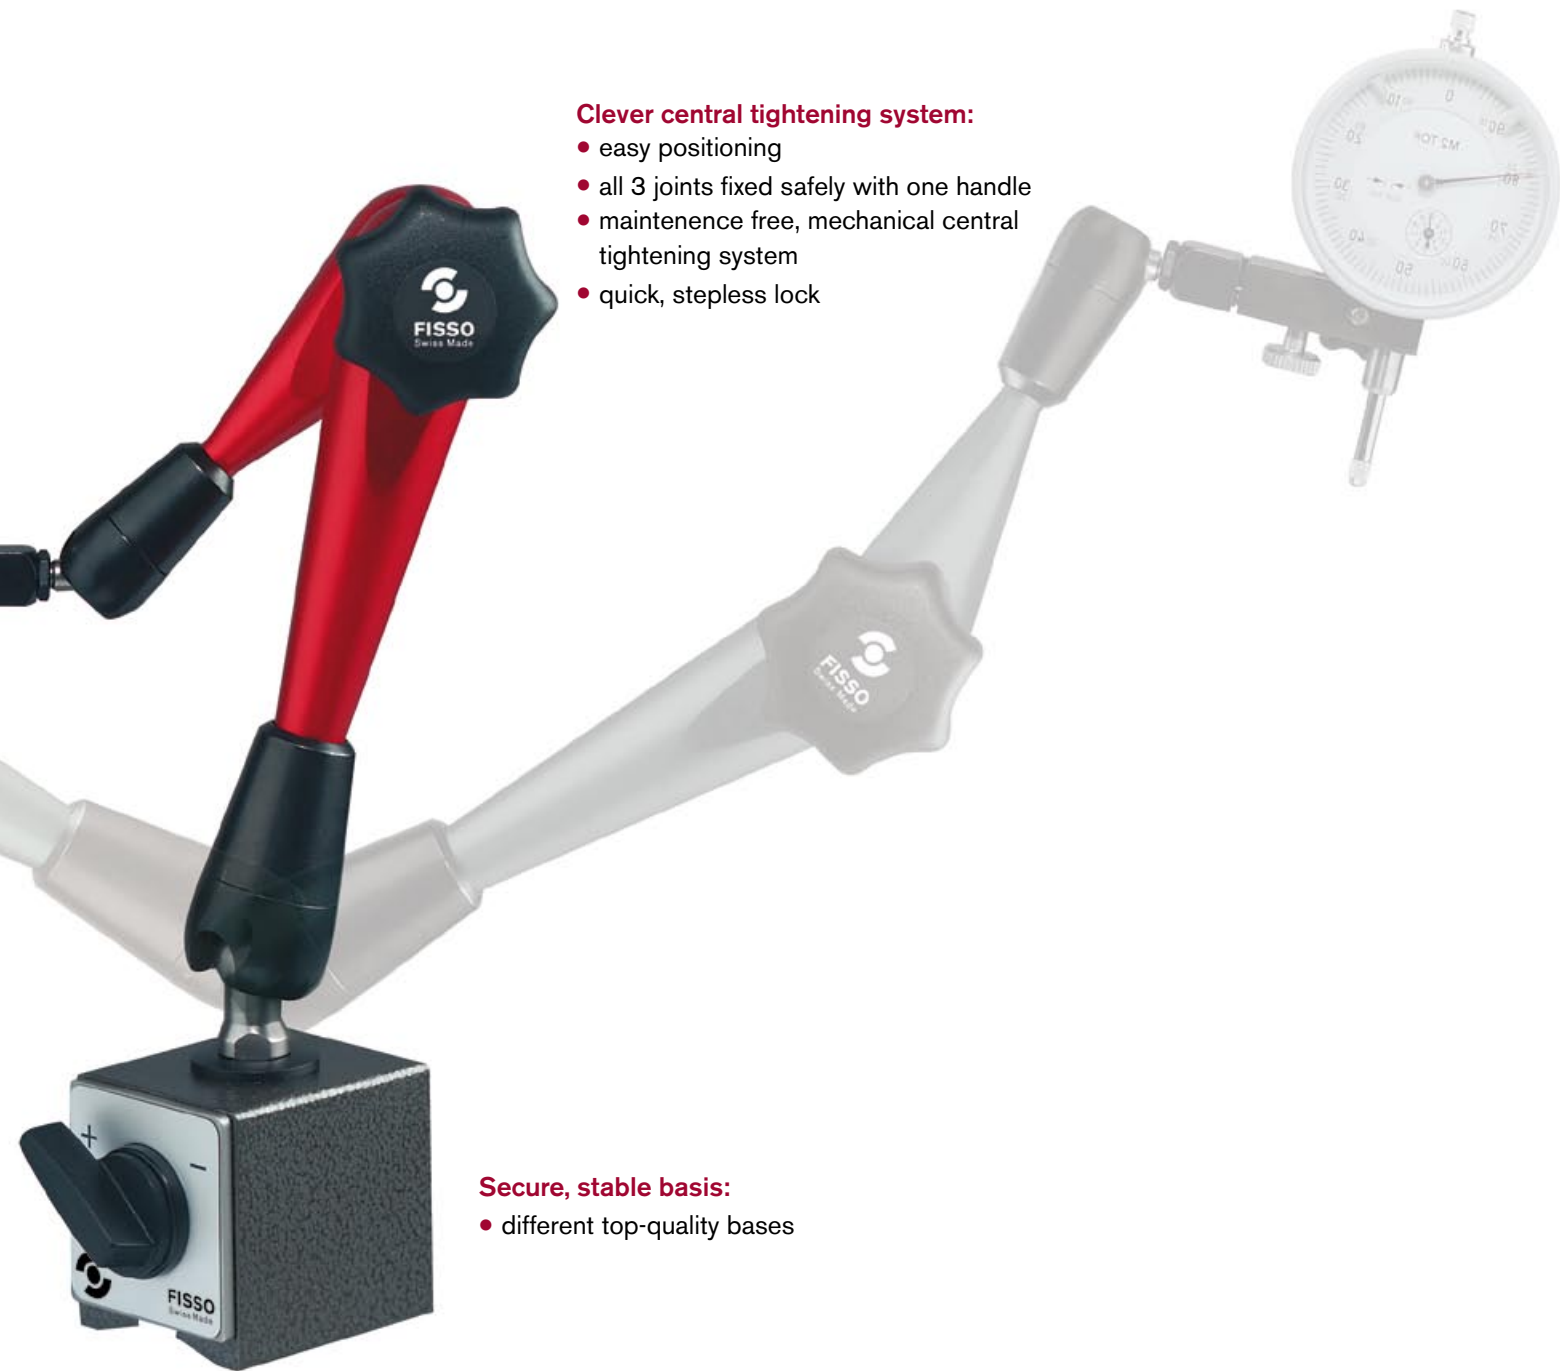

**Clever central tightening system:**

- easy positioning
- all 3 joints fixed safely with one handle
- maintenance free, mechanical central tightening system
- quick, stepless lock

**Secure, stable basis:**

- different top-quality bases

Fisso systems are made of high-quality steel and light alloy. Their solid quality guarantees a long-lasting and maintenance-free service life.

**Stability**

The strongly dimensioned components and precise fitting in the ball joint assure high stability.

## Perfect standard solutions.

The Strato Line is the modern series with red anodized arm sections made of high-quality light alloy. The articulated arms are available in three sizes and can be combined with different bases. All models are equipped with a zero-play microfine adjustment (F) with a combined holder for dial gauges, electronic length probes with shaft diameters of 8mm (or 3/8") and gauges with dovetails.



**XS-13 F+S2**

**XS-13 (L 130 mm)**

Standard sets:  
XS-13 F+TMS  
XS-13 F  
XS-13 F+S2



**S-20 F+M**

**S-20 (L 200 mm)**

Standard sets:  
S-20 F+M  
S-20 F+TM (with column 50mm)  
S-20 F+AM  
S-20 F+AMO  
S-20 F



**M-28 F+M**

**M-28 (L 280 mm)**

Standard sets:  
M-28 F+M  
M-28 F+V  
M-28 F  
M-28 F+G  
M-28 F+SM

For additional information on the respective standard sets please see table on the back page and visit [www.fisso.com](http://www.fisso.com).

### Bases:

- Switch magnet with prism-shaped base, can be switched on/off with a lever (M, S2, SM).
- Pot magnet, cannot be switched on/off (TM, TMS).
- Anyform magnet for contoured surfaces. The 70 steel segments adapt to the surface easily and precisely. Available in a switchable (AMO) and non-switchable version (AM).
- Vacuum base (V) particularly suitable for granite and all other smooth and non-porous surfaces. The base is fixed and moved by means of a rocker lever.
- Granite sliding base (G) slides smoothly across granite surfaces, e.g. when checking for parallelism. Smoothly ground front, 0.01mm of underside has been hollow-ground, with dust grooves.

The dimensioning of the bases matches the articulated arm size.

## Modular individual solutions.

To meet specific customer requirements, individual Fisso holding systems are assembled from parts in our extensive components catalog ([www.fisso.com](http://www.fisso.com)).

We would be happy to advise you so that you work with the optimal Fisso system.



